


The **NDF8002** is a low-loss, compact, and economical surface-acoustic-wave (**SAW**) RF filter in a surface-mount ceramic **DCC6C** case for wireless audio application. It provides Low amplitude ripple and high image frequency suppression.

1. Package Dimensions (DCC6C)

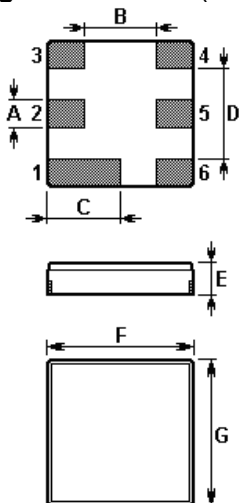

| Pin | Configuration |
|------------|----------------|
| 2 | Input / Output |
| 5 | Output / Input |
| 1, 3, 4, 6 | Case Ground |


| Sign | Data (unit: mm) | Sign | Data (unit: mm) |
|------|-----------------|------|-----------------|
| A | 0.6 | E | 1.1 |
| B | 1.5 | F | 3.0 |
| C | 1.5 | G | 3.0 |
| D | 1.8 | | |

2. Marking




Laser Marking

3. Test Circuit

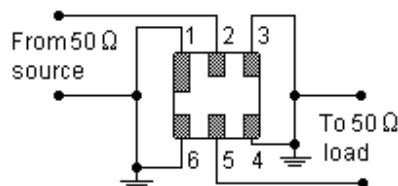

4. Typical Frequency Response

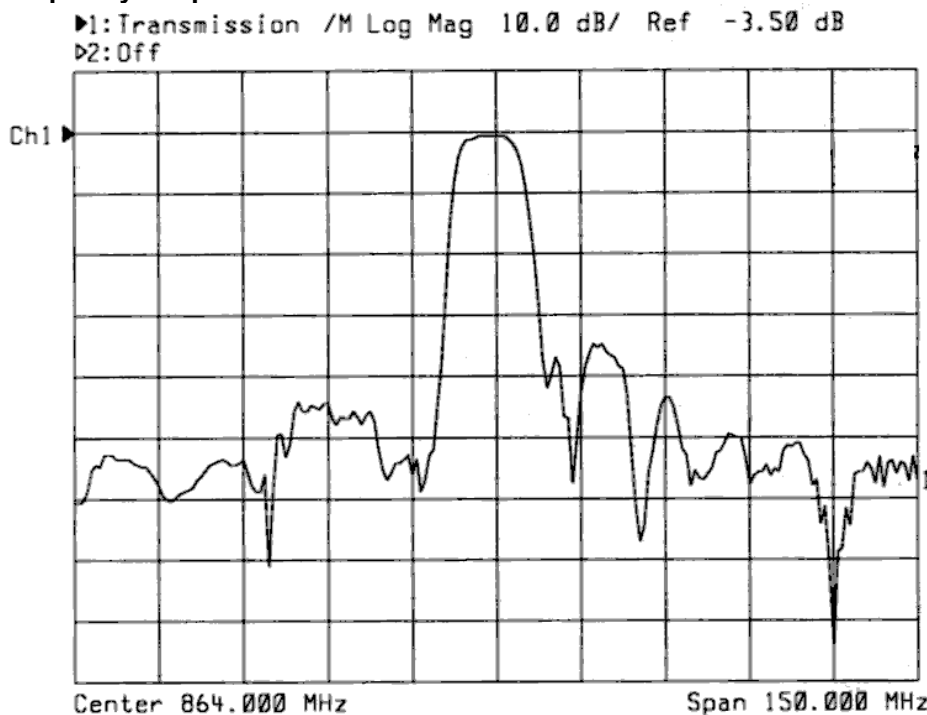

5. Performance

5-1. Maximum Ratings

| Rating | | Value | Unit |
|----------------------------|-----------|------------|------|
| Input Power Level | P | 10 | dBm |
| DC Voltage | V_{DC} | 12 | V |
| Operable Temperature Range | T_A | -10 to +65 | °C |
| Storage Temperature Range | T_{stg} | -40 to +85 | °C |

5-2. Electronic Characteristics

| Item | | Specifications |
|------------------------------------|----------------|----------------|
| Nominal Center Frequency | f_C | 864.000 MHz |
| Insertion Loss | IL | 4.5dB max. |
| within $f_C \pm 1.0\text{MHz}$ | | |
| Absolute Attenuation | α | |
| 1) within 820 ... 823 MHz | | 40dB min. |
| 2) within 841 ... 844 MHz | | 35dB min. |
| 3) within 884 ... 887 MHz | | 35dB min. |
| 4) within 905 ... 908 MHz | | 40dB min. |
| Ripple Deviation | $\Delta\alpha$ | 1.5dB max. |
| within $f_C \pm 1.0\text{MHz}$ | | |
| Input / Output Impedance (Nominal) | | 50 Ω |

ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

© NEDI 2003. All Rights Reserved.

1. The frequency f_C is defined as the midpoint between the 3dB frequencies.
2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50 Ω test system with VSWR \leq 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_C . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
4. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
5. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
6. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
7. For questions on technology, prices and delivery, please contact our sales offices or e-mail winnsky@winnsky.com