


The **NDF8070** is a low-loss, compact, and economical surface-acoustic-wave (**SAW**) RF filter in a surface-mount ceramic **DCC6C** case for AMPS, CDMA and TDMA applications.


1. Package Dimensions (DCC6C)

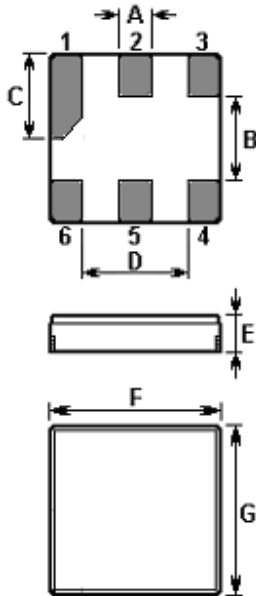

Pin	Configuration
2	Input / Output
5	Output / Input
others	Case Ground

Sign	Data (unit: mm)	Sign	Data (unit: mm)
A	0.6	E	1.1
B	1.5	F	3.0
C	1.5	G	3.0
D	1.8		

2. Marking




2-1. N D F

- The characters "ND" indicates our company's mark for short
- The third character "F" indicates the type of SAW component
Including: F(filter), R(resonator) etc.

2-2. 8 0 7 0


- The "8070" indicates the model name of SAW component

3. Test Circuit

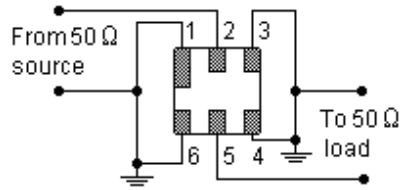

No impedance matching required for operation at 50 Ω .

4. Frequency Characteristics

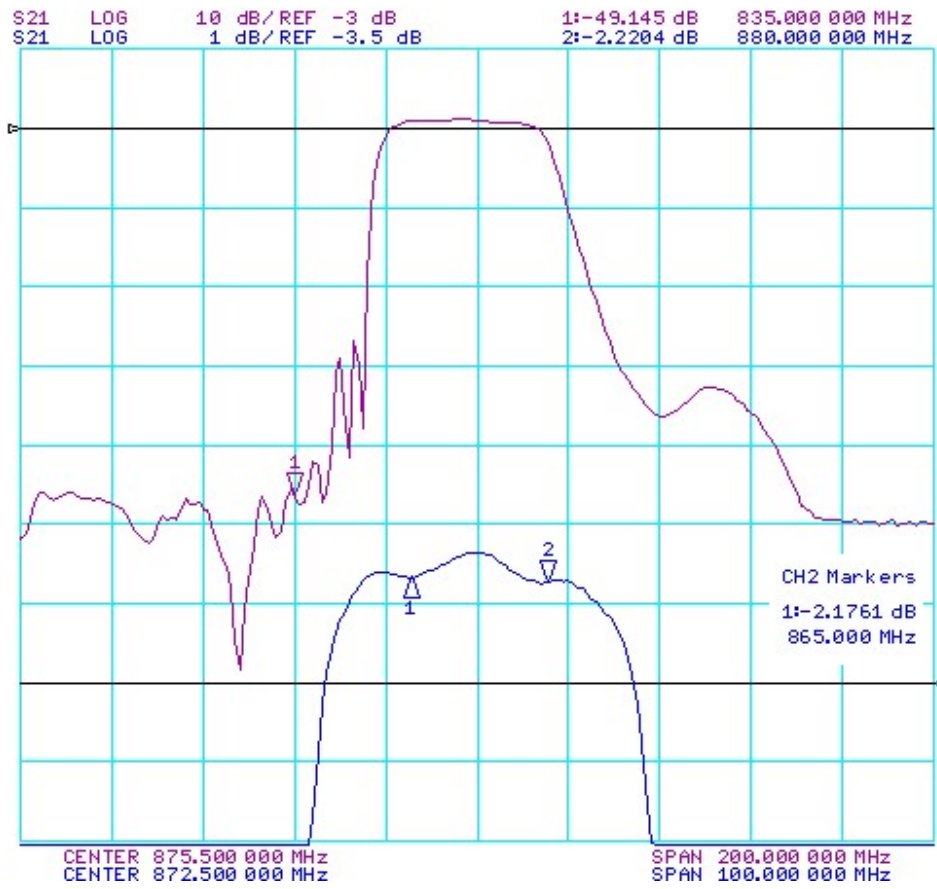

5. Performance

5-1. Maximum Ratings

Rating	Value	Unit
Input Power Level	10	dBm
DC Voltage	12	V
Storage Temperature Range	-40 to +85	°C
Operating Temperature Range	-40 to +85	°C

5-2. Electronic Characteristics

Parameter	Minimum	Typical	Maximum	Unit
Center Frequency f_C	--	872.500	--	MHz
3dB Bandwidth BW_3	--	± 17.0	--	MHz
Usable Bandwidth BW_{UES}	--	± 12.5	--	MHz
Insertion Loss 860.00 MHz 885.00 MHz IL	--	2.5	3.5	dB
Amplitude Variation (p-p) 860.00 MHz 885.00 MHz $\Delta \alpha$	--	0.8	1.5	dB
Absolute Attenuation α				
10.00 MHz 770.00 MHz	45	50	--	dB
770.00 MHz 835.00 MHz	40	45	--	dB
905.00 MHz 961.00 MHz	25	30	--	dB
961.00 MHz 1040.0 MHz	45	55	--	dB
1040.0 MHz 2000.0 MHz	40	50	--	dB
Input / Output Impedance	50			Ω

ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

© NEDI 2008. All Rights Reserved.

1. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50Ω test system with $VSWR \leq 1.2:1$. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_C . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
2. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
3. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
4. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
5. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
6. For questions on technology, prices and delivery, please contact our sales offices or e-mail winnsky@winnsky.com