



Features

- Low-loss RF filter for mobile systems
- Low amplitude ripple
- No matching network required for operation at 50Ω
- Ceramic package for **Surface Mounted Technology (SMT)**
- Lead-free production and **RoHS** compliant

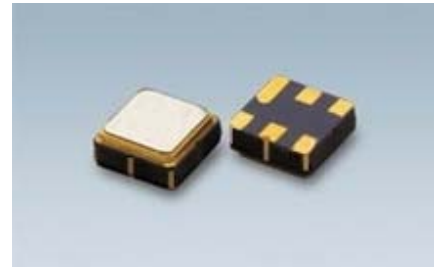

Package Dimensions

Ceramic Package: **DCC6C**

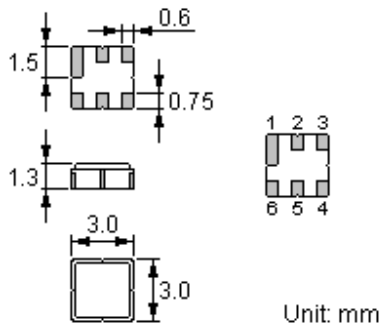

Pin Configuration

| | |
|------------|--------|
| 2 | Input |
| 5 | Output |
| 1, 3, 4, 6 | Ground |

Marking



Top View, Laser Marking

- "ND": Manufacturer's mark
- "F": SAW filter
- "NDF9170": Part number
- "*": Terminal 1
- "*": Lot number (The code shown below varies in a 4-year cycle)

| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------|---|---|---|---|---|---|---|---|---|----|----|----|
| 2009 | A | B | C | D | E | F | G | H | J | K | L | M |
| 2010 | N | P | Q | R | S | T | U | V | W | X | Y | Z |
| 2011 | a | b | c | d | e | f | g | h | i | j | k | m |
| 2012 | n | p | q | r | s | t | u | v | w | x | y | z |

Maximum Ratings

| Rating | Value | Unit |
|-----------------------------|-----------|--------------|
| Input Power Level | P | 10 dBm |
| DC Voltage | V_{DC} | 0 V |
| Operating Temperature Range | T_A | -40 ~ +85 °C |
| Storage Temperature Range | T_{stg} | -40 ~ +85 °C |


Electrical Characteristics



| Item | Minimum | Typical | Maximum | Unit |
|---|----------------|---------|---------|----------|
| Insertion Loss | | 1574 | | |
| 1564.000 1584.000 MHz | -- | 1.7 | 3.0 | dB |
| Absolute Attenuation | | | | |
| DC600.00 MHz | 25 | 32 | | dB |
| 600.00 1510.00 MHz | 30 | 36 | | dB |
| 1510.00 1534.00 MHz | 25 | 40 | | dB |
| 1614.00 1650.00 MHz | 20 | 30 | | dB |
| 1650.00 3000.00 MHz | 25 | 29 | | dB |
| Amplitude Ripple (p-p) 1564.000 1584.000 MHz | $\Delta\alpha$ | 0.7 | 1.2 | dB |
| Group delay ripple 1564.000 1584.000 MHz | | 20 | 40 | ns |
| Input VSWR | | | | |
| 1564.000 1584.000 MHz | -- | 1.7: 1 | 2.2: 1 | |
| Output VSWR | | | | |
| 1564.000 1584.000 MHz | -- | 1.7: 1 | 2.2: 1 | |
| Input / Output Impedance (Nominal) | | 50 | | Ω |

RoHS Compliant

Electrostatic Sensitive Device

Typical Frequency Response

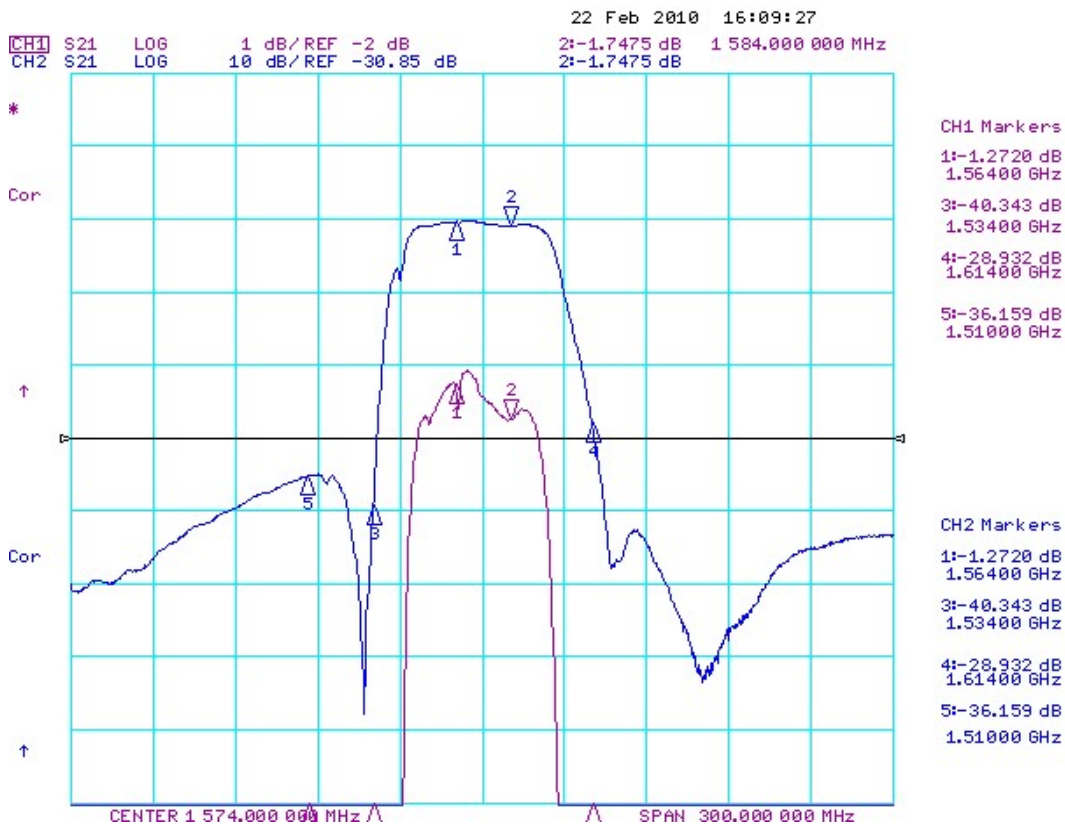

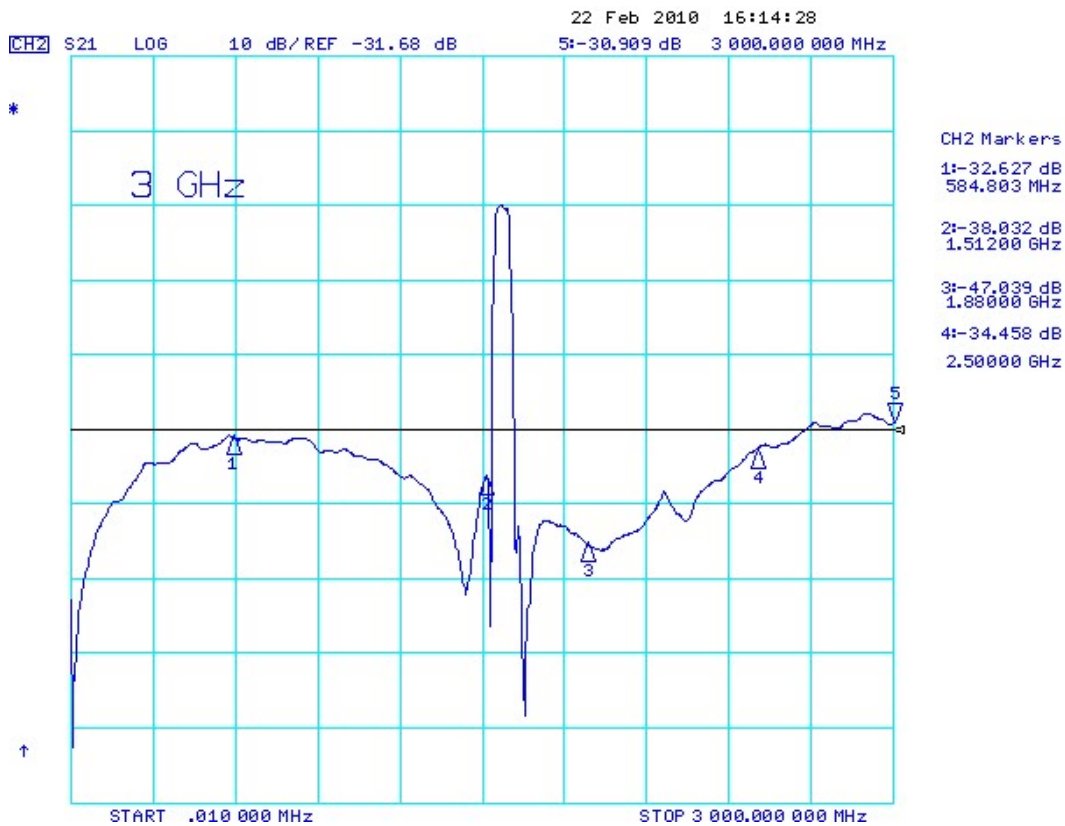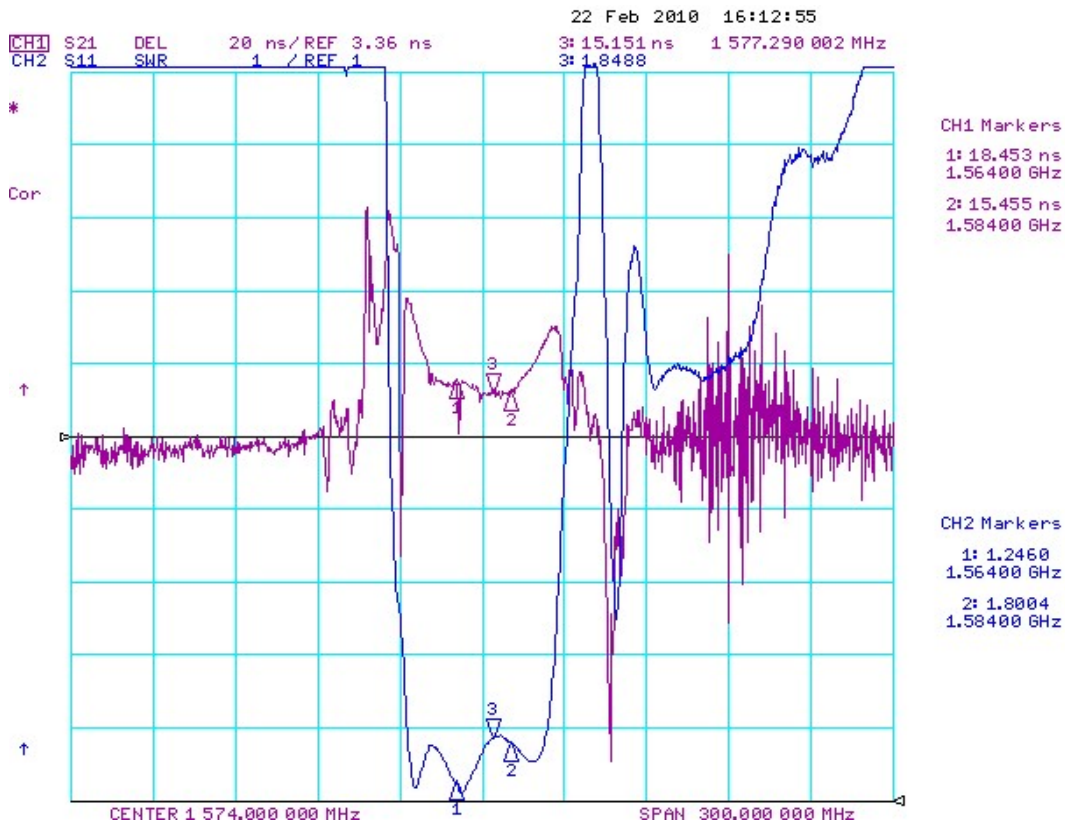

Stability Characteristics


| | Test item | Condition of test |
|---|---------------------------|--|
| 1 | Mechanical shock | (a) Drops: 3 times on concrete floor (b) Height: 1.0 m |
| 2 | Vibration resistance | (a) Frequency of vibration: 10~55Hz (c) Directions: X,Y and Z (b) Amplitude: 1.5 mm (d) Duration: 2 hours |
| 3 | Moisture resistance | (a) Condition: 40°C, 90~95% R.H. (c) Wait 4 hours before measurement (b) Duration: 96 hours |
| 4 | Climatic sequence | (a) +70°C for 16 hours (c) -25°C for 2 hours (e) Wait 4 hours before measurement (b) +55°C for 24 hours, 90~95% R.H. (d) +40°C for 24 hours, 90~95% R.H. |
| 5 | High temperature exposure | (a) Temperature: 70°C (c) Wait 4 hours before measurement (b) Duration: 250 hours |
| 6 | Thermal impact | (a) +70°C for 30 minutes ⇒ -25°C for 30 minutes repeated 3 times (b) Wait 4 hours before measurement |

Requirements: The SAW filter shall remain within the electrical specifications after tests.


Remarks

- SAW devices should not be used in any type of fluid such as water, oil, organic solvent, etc.
- Be certain not to apply voltage exceeding the rated voltage of components.
- Do not operate outside the recommended operating temperature range of components.
- Sudden change of temperature shall be avoided, deterioration of the characteristics can occur.
- Be careful of soldering temperature and duration of components when soldering.
- Do not place soldering iron on the body of components.
- Be careful not to subject the terminals or leads of components to excessive force.
- SAW devices are electrostatic sensitive. Please avoid static voltage during operation and storage.
- Ultrasonic cleaning shall be avoided. Ultrasonic vibration may cause destruction of components.

Test Circuit

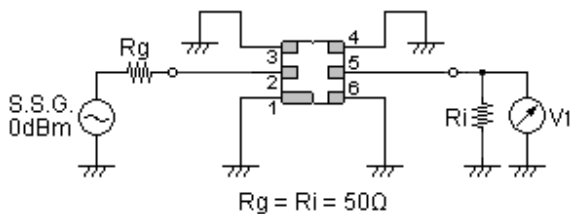


Recommended Land Pattern

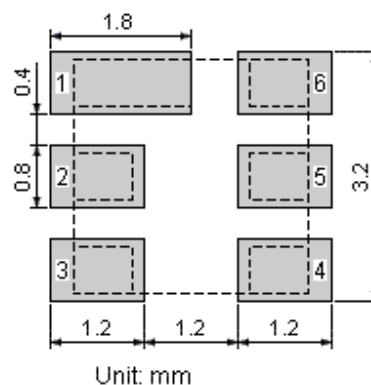


Packing Information

Carrier Tape

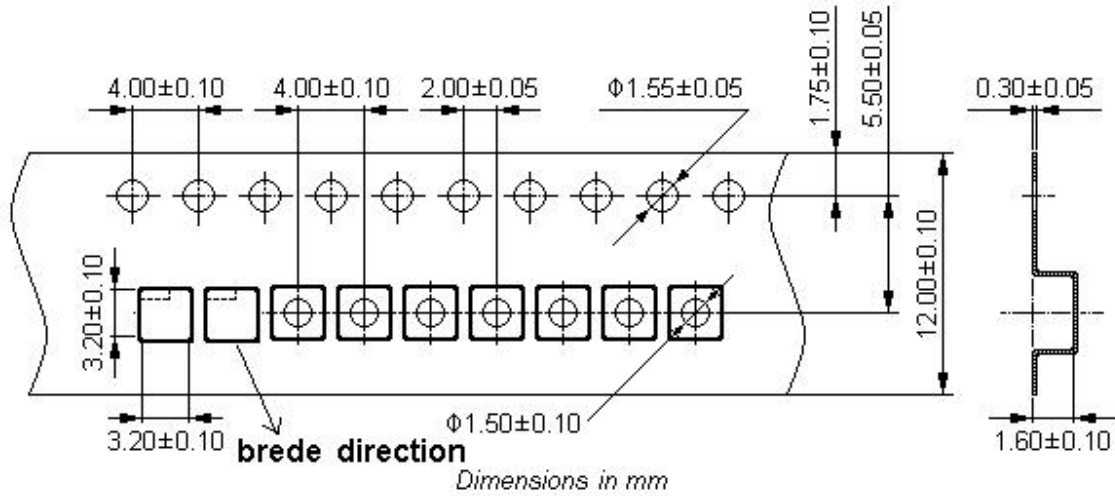

Reel Dimensions

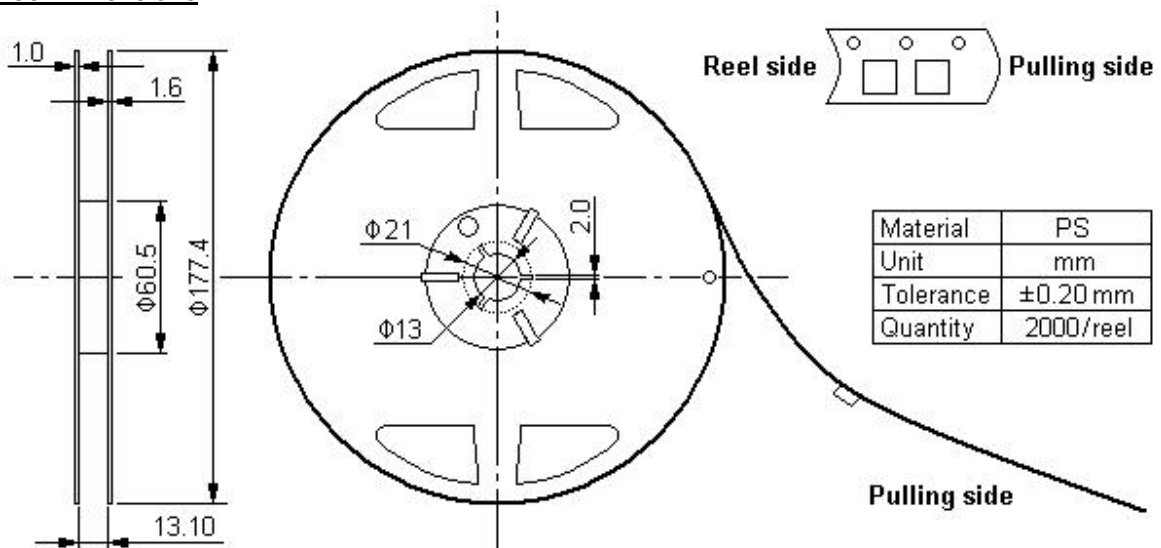


Outer Packing

| Type | Quantity | Dimension | Description | Weight |
|---------------|----------|-------------|---|--------|
| Carton Box I | 10000 | 190×190×95 | anti-static plastic bag & carton box 1 reel / bag | 0.85 |
| Carton Box II | 20000 | 190×190×190 | 5 bags / box (10000 pcs) 10 bags / box (20000 pcs) | 1.80 |

Unit: mm

Unit: kg

Recommended Soldering Profile

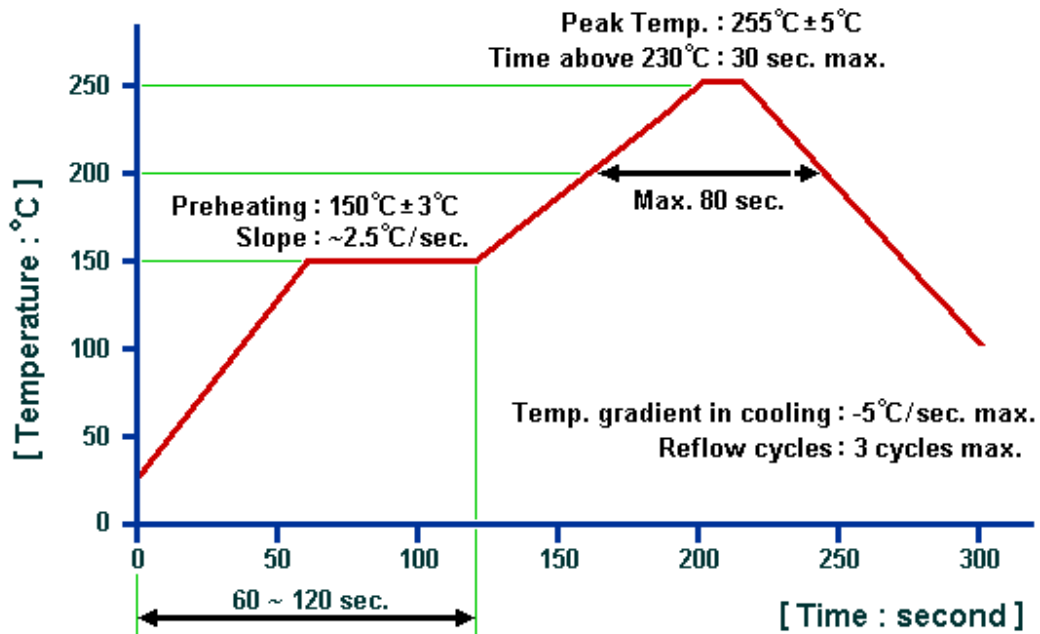

© NEDI 2010. All Rights Reserved.

1. The specifications of this device are subject to change or obsolescence without notice.
2. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
3. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
4. For questions on technology, prices and delivery, please contact our sales offices or e-mail winnsky@winnsky.com