


Application

- Low-loss SAW duplexer for mobile telephone Cellular/WCDMA band V systems
- Low amplitude ripple
- Low insertion attenuation

Features

- Ceramic Package for **Surface Mounted Technology (SMT)**
- **RoHS** compatible
- Package size 2.0*1.6
- Approx. weight 0.014g
- **Electrostatic Sensitive Device(ESD)**

Package Dimensions

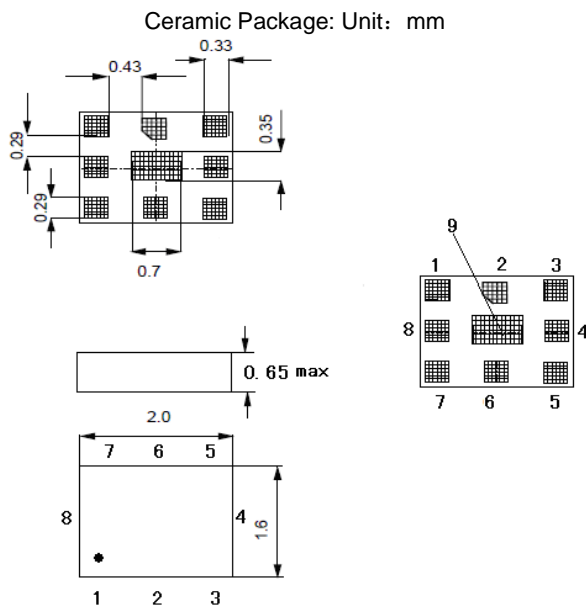

Pin Configuration

6	Antenna
3	TX Input
1	RX Output
2, 4, 5, 7, 8, 9	To Be Grounded

Marking



Top View, Laser Marking

- "ND": Manufacturer's mark
- "F": SAW filter
- "D5": Part number
- "✱": Terminal 1
- "*": Lot number (The code shown below varies in a 4-year cycle)

Code	1	2	3	4	5	6	7	8	9	10	11	12
2013	A	B	C	D	E	F	G	H	J	K	L	M
2014	N	P	Q	R	S	T	U	V	W	X	Y	Z
2015	a	b	c	d	e	f	g	h	i	j	k	m
2016	n	p	q	r	s	t	u	v	w	x	y	z