


**Features**

- Microwave Circulators and Isolators for base station
- Metal Package for **Surface Mounted Technology (SMT)**
- Lead-free Production and **RoHS** Compliance

**Package Dimensions**

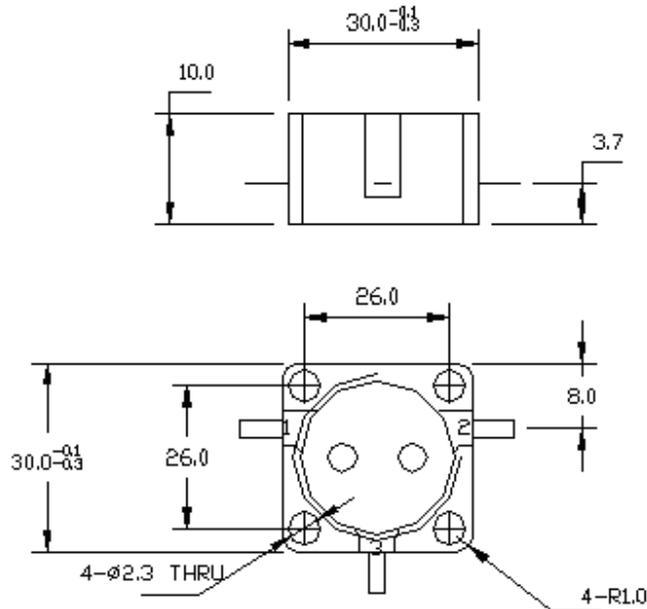

<p style="text-align: center;"><b>Marking</b></p> <p style="text-align: center;">****</p> <p style="text-align: center;">I → O</p> <p style="text-align: center;">824-849MHz</p> <p style="text-align: center;">NDC8005</p> <p style="text-align: center;">L</p>	Top View, Laser Marking													
	"ND":	Manufacturer's mark						"C":	Circulator					
	"8005":	Part number						".":	Terminal 1					
	" "	IN	"O"	OUT	"L"	LOAD	→	Conduct Direction						
		824-849MHz : operating Frequency Range												
	"*":	Lot number (the first two numbers of years and the last two numbers of weeks)												

Code	1	2	3	4	5	6	7	8	9	10	11	12
2015	a	b	c	d	e	f	g	h	i	j	k	m
2016	n	p	q	r	s	t	u	v	w	x	y	z
2017	A	B	C	D	E	F	G	H	J	K	L	M
2018	N	P	Q	R	S	T	U	V	W	X	Y	Z

**Maximum Ratings**

Rating		Value	Unit
Source Power	$P$	100	W
DC Voltage	$V_{DC}$	10	V
Operating Temperature Range	$T_A$	-40 ~ +85	°C
Storage Temperature Range	$T_{stg}$	-40 ~ +85	°C

**Electrical Characteristics**


Reference temperature:  $T_A = 25\text{ °C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 50\ \Omega$

Characteristic		Min.	Typ.	Max.	Unit
Center frequency	$f_c$	824		849	MHz
Insertion attenuation	$IL$	—		0.40	dB
Isolation		20		—	dB
Input return Loss		20			dB
Output return		20			dB

RoHS Compliant

Electrostatic Sensitive Device

**Recommended Soldering Profile**

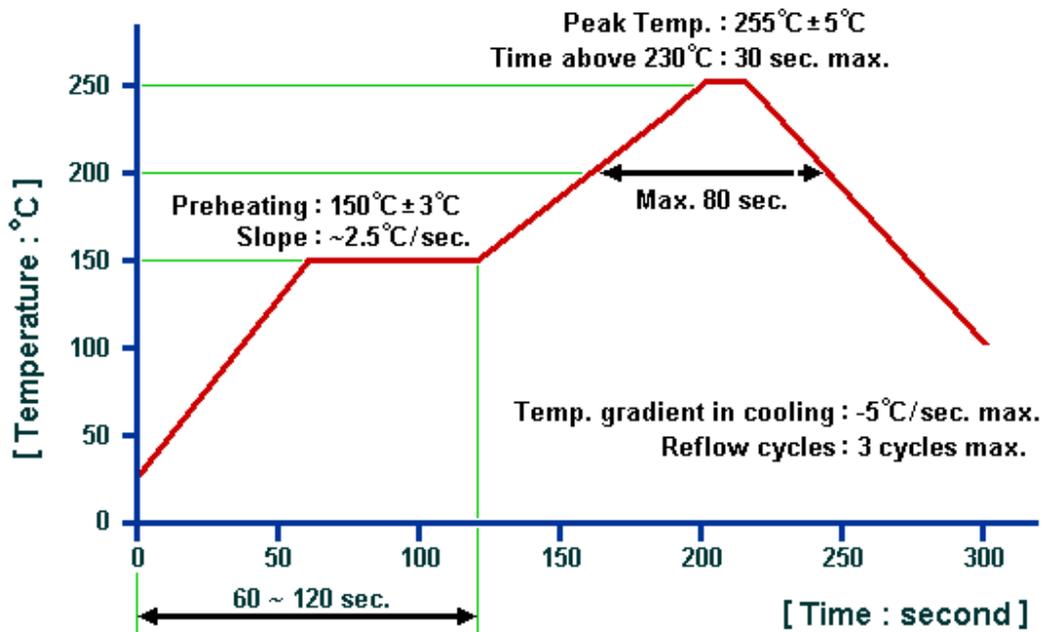

© NEDI 2015. All Rights Reserved.

Our liability is only assumed for the circulator and isolator component(s) per se, not for applications, processes and circuits implemented within components or assemblies.

For questions on technology, prices and delivery, please contact our sales offices or e-mail [winnsky@winnsky.com](mailto:winnsky@winnsky.com).