


The **NDF5019** is a low-loss, compact, and economical surface-acoustic-wave (SAW) RF filter in a surface-mount ceramic **DCC6** case with center frequency **770.000 MHz**.

1. Package Dimensions (DCC6)

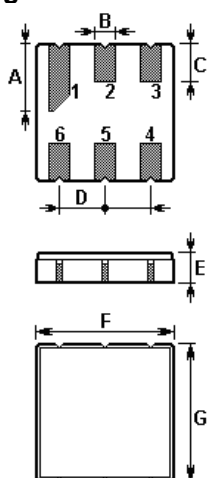

Pin	Configuration
2	Input
5	Output
1, 3, 4, 6	Ground


Sign	Data (unit: mm)	Sign	Data (unit: mm)
A	1.90±0.1	E	1.35±0.15
B	0.64±0.1 (x6)	F	3.80±0.15
C	1.00±0.1 (x5)	G	3.80±0.15
D	1.27±0.1 (x4)		

2. Marking




Laser Marking

3. Test Circuit

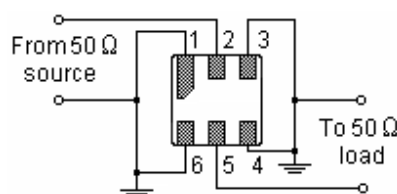

4. Typical Frequency Response

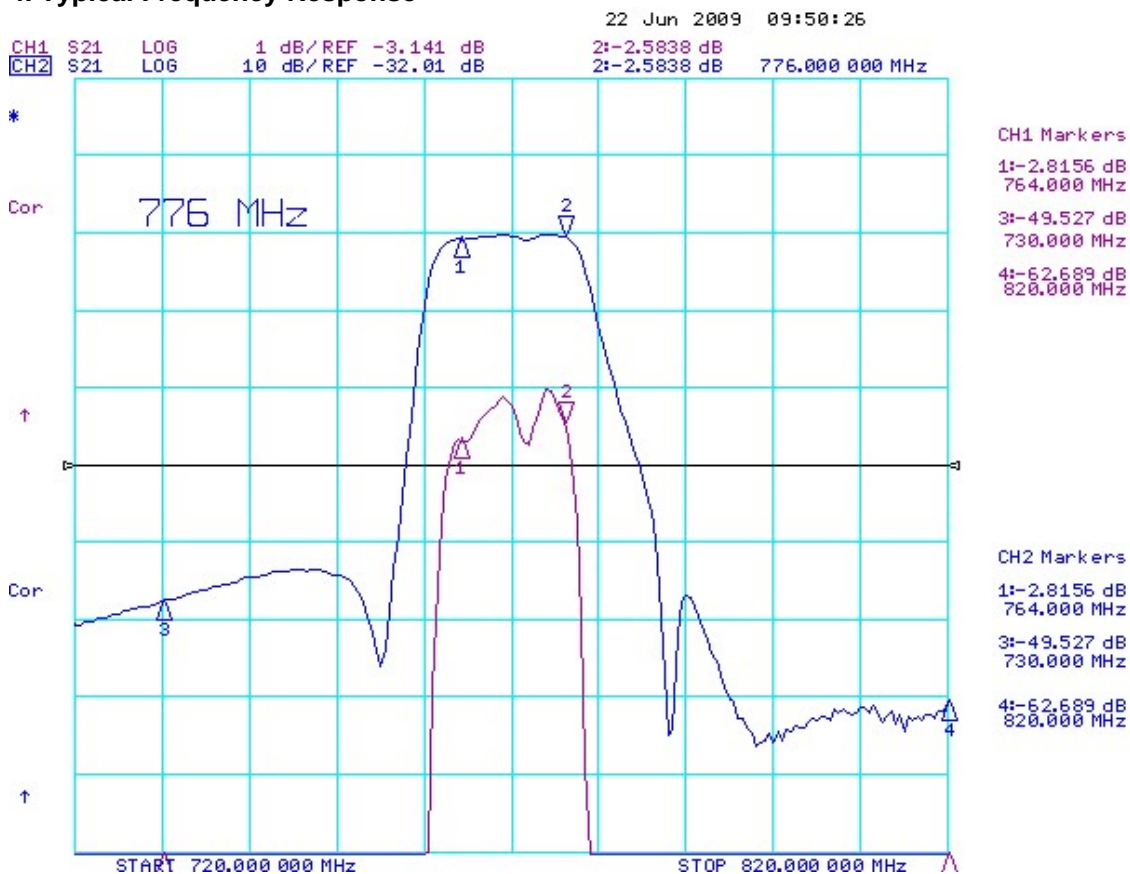

5. Performance

5-1. Maximum Ratings

Rating		Value	Unit
Input Power Level	P	10	dBm
DC Voltage	V_{DC}	12	V
Operable Temperature Range	T_A	-20 to +70	°C
Storage Temperature Range	T_{stg}	-40 to +85	°C

5-2. Electronic Characteristics

Characteristic		Min.	Typ.	Max.	Unit
Center Frequency	f_c		770.000		MHz
Insertion Loss 764.00 MHz 776.00 MHz	IL	--	3.0	4.0	dB
Passband Ripple 764.00 MHz 776.00 MHz	$\Delta\alpha$	--	1.0	2.0	dB
Relative Attenuation (relative to IL) DC 600.00 MHz 600.00 MHz 730.00 MHz 820.00 MHz 1500.0 MHz	α_{rel}	40 40 40	55 48 55	-- -- --	dB dB dB
Input / Output Impedance		50			Ω

ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

© NEDI 2009. All Rights Reserved.

1. The frequency f_c is defined as the midpoint between the 3dB frequencies.
2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50Ω test system with VSWR≤2.0:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
4. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
5. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
6. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
7. For questions on technology, prices and delivery, please contact our sales offices or e-mail winnsky@winnsky.com.